




Home > GARAGE > Reel and Recoil Air hose > SD2_

SD2_

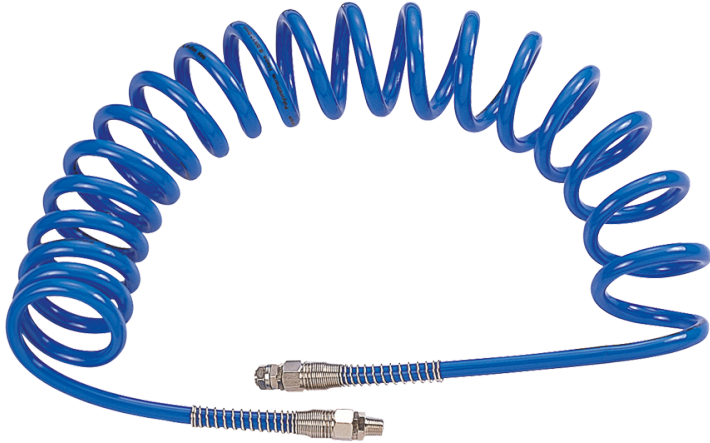

Extention spiral bound

- + Polyurethane hose
- + -20°C ~ +70°C temperature resistance.
- + A spring guard protects both ends of hose. Both ends have male 360° swivel fittings.
- + Returns automatically to the original position and keeps it out of user's way during operation.



SD23110

ø hose inside (mm) : 8

ø hose outside (mm) : 12

Air Pressure (bar) : 7

Max. air pressure (bar) : 20

Air inlet (inch) : 1/4"

Hose length (mM) : 10

Weight (g) : 500

SD23210

ø hose inside (mm) : 5

ø hose outside (mm) : 8

Air Pressure (bar) : 7

Max. air pressure (bar) : 20

Air inlet (inch) : 1/4"

Hose length (mM) : 10



Weight (g) : 935

SD23115

∅ hose inside (mm) : 8

∅ hose outside (mm) : 12

Air Pressure (bar) : 7

Max. air pressure (bar) : 20

Air inlet (inch) : 1/4"

Hose length (mM) : 15

Weight (g) : 1350

SD23315

∅ hose inside (mm) : 10

∅ hose outside (mm) : 15

Air Pressure (bar) : 7

Max. air pressure (bar) : 20

Air inlet (inch) : 3/8"

Hose length (mM) : 15

Weight (g) : 650

SD24415

∅ hose inside (mm) : 13

∅ hose outside (mm) : 18

Air Pressure (bar) : 7

Max. air pressure (bar) : 20

Air inlet (inch) : 1/2"

Hose length (mM) : 15

Weight (g) : 650